



windie™

Update 2010/2011

March 2011

WINDIE™ Validation Programme. This document reports on the results of the ongoing validation programme of the WINDIE™ CFD software in terms of wind resource assessment. Validation efforts have mainly taken the shape of cross-predictions between measurement data, whereby WINDIE™ results are synthesised with one measured wind series and transported to another mast's position. The resulting 'virtual' data series can then be compared with measurements at the target station. This assessment is carried out in all WINDIE™ studies, which are usually conducted prior to wind farm construction. In some cases, when WINDIE™ is used after the wind farm has been in operation, the opportunity may arise to compare WINDIE™ AEP estimates with wind farm SCADA data.

1. Introduction

WINDIE™ is a computational fluid dynamics (CFD) code developed by a team of researchers from the Instituto Superior de Engenharia do Porto (ISEP, www.isep.ipp.pt). This team, lead by Prof. Fernando Aristides Castro, has over 15 years experience in the field of CFD modelling of atmospheric flows applied to the wind industry.

WINDIE™ is a non-linear model that solves the Reynolds-averaged Navier-Stokes equations (RaNS), on terrain-following meshes. It is specially suited to capture complex phenomena such as flow separation, turbulence induced by complex topography, thermal effects, large flow deviations and shear, as well as other flow features such as those induced by neighbouring forested areas.

Over the past 6 months, WINDIE™ has been used to study wind farms totalling over 250 MW of installed capacity, spread over 4 countries.

2. Standing Out from the Pack

WINDIE™ CFD code contains a number of features that make it stand out from other wind engineering packages.

Coupling with Mesoscale Data. The use of mesoscale results as boundary conditions to WINDIE™ has been shown to improve results by bringing more realistic boundary conditions to the CFD computational domains.

Modelling Thermal and Coriolis Effects. WINDIE™ can also solve the temperature field and include its effects (in terms of buoyancy and turbulence production/destruction) in the flow field. Coriolis effects are also accounted for.

Forest Canopy Model. WINDIE™ has one of the most advanced forest canopy models, extensively validated with real data (Lopes da Costa (2006)). It describes the vertical shape of the trees in terms of its leaf area density and it has detailed interpolation techniques to model small or complex-shaped tree patches.

Turbulence Modelling Portfolio. WINDIE™ contains no less than 5 turbulence models in its portfolio. These models can help confirm site assessment results or help investigate phenomena that a single model may not capture. In essence, it presents the user with more possibilities of investigating what is going on at a given site.

Growing Validation Track Record. WINDIE™, in its first year of activity as a fully-fledged wind engineering tool has come up against several real cases of considerable complexity. It has consistently outperformed WAsP and other CFD codes in cross-predictions of mean wind speeds and in predictions of wind farm production and wind energy patterns compared with actual wind farm data.




3. WINDIE™ Validation Programme


WINDIE™ validation track record is growing every month with new cases in varied conditions. In all cases thus far WINDIE™ results are compared with measurements and with WASP predictions. Whenever results are also available using a commercial wind engineering CFD tool, an additional comparison is performed. The programme comprises 38 comparisons thus far involving 5 different and varied sites: from complex to simple topographies to forested and non-forested areas. More details on each site and individual cross-prediction results can be found in WINDIE™'s White Paper 2010/2011 (www.megajoule.pt).

The following table and graph summarise the results of the validation programme.

	WINDIE™	WASP	Other CFD
Average Diff	0.0%	-0.3%	0.4%
RMS	3.8%	7.6%	4.2%
STDEV	3.8%	5.1%	4.4%
R2	0.924	0.868	0.741
R	0.961	0.932	0.861

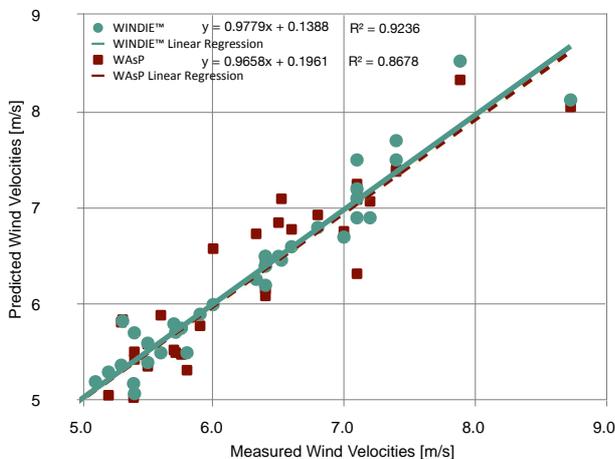

WINDIE™ has also been validated against SODAR data ranging from 40 to 120m agl, in densely wooded areas, as shown below.

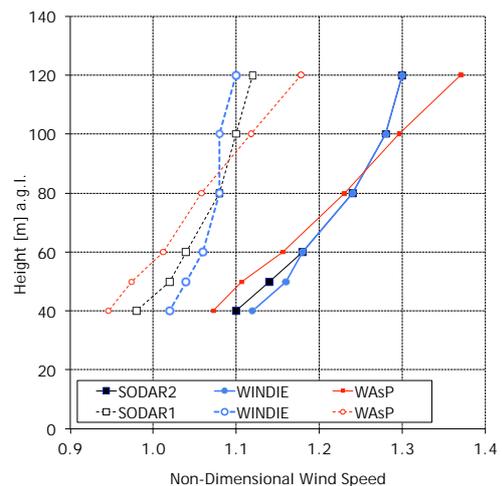

The two SODAR campaigns at Site 5 permitted the **validation of the vertical profiles** predicted by WINDIE™, at heights covering the rotor swept area. Numerical results at SODAR1 were similar in trend to the measurements and in better agreement than WASP's. At SODAR2, WINDIE™ results were remarkably coincident with the measurements, as shown in the graph.

Conclusion. This white paper reported on WINDIE™'s validation programme. It focussed exclusively on resource assessment results. WINDIE™ results were shown to be better than both WASP and another CFD code used in the wind industry. The programme includes a total of 38 comparisons so far, across 5 different sites in 4 different countries. WINDIE™ compared particularly favourably against SODAR data ranging from 40 to 120m above ground level. A future white paper will be published concerning WINDIE™'s performance in terms of site assessment quantities. A full version of this document can be found at www.megajoule.pt.

Further Info. www.megajoule.pt
www.facebook.com/MEGAJOULE
www.youtube.com/MEGAJOULEConsultants
www.linkedin.com/MEGAJOULE
www.twitter.com/MEGAJOULE

carlos.santos@megajoule.pt
windie.lda@gmail.com



Megajoule Inovação, Lda.
 Rua Engº Frederico Ulrich 2650
 4470-605 Maia Portugal

WINDIE™ is a registered trademark of WINDIE, Lda. Commercial use is reserved to Megajoule Inovação. WINDIE™ is the intellectual property of Fernando Aristides Castro, Carlos Silva Santos and José Carlos Lopes da Costa.



Instituto Superior de Engenharia do Porto
 Rua Dr Ant Bernardino de Almeida 431
 4200-072 Porto Portugal